
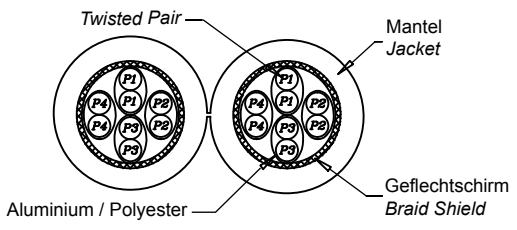


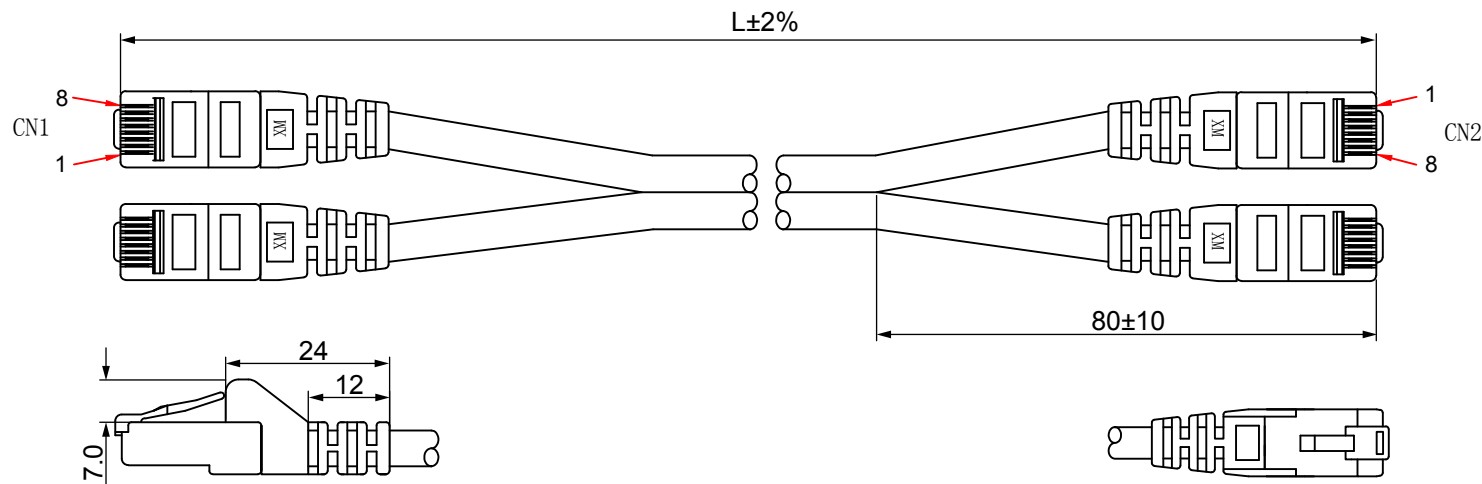

	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																					
A	<div><p>Mantel/ Jacket - OD: 12.1±0.2*6.0±0.2 mm Isolation / Insulation - OD: 1.0±0.03 mm</p></div>				<div></div>										A																																				
B															B																																				
C															C																																				
D															D																																				
E	<div></div>				<div>CN1 (568B)      CN2 (568B)</div> <div><table><tr><th>Nr. / No.</th><th>Länge / length</th><th>Farbe / color</th></tr><tr><td>93755</td><td>0,25 m</td><td>grau / grey</td></tr><tr><td>93756</td><td>0,50 m</td><td>grau / grey</td></tr><tr><td>93757</td><td>1,00 m</td><td>grau / grey</td></tr><tr><td>93770</td><td>1,50 m</td><td>grau / grey</td></tr><tr><td>93772</td><td>2,00 m</td><td>grau / grey</td></tr><tr><td>93771</td><td>3,00 m</td><td>grau / grey</td></tr><tr><td>93773</td><td>5,00 m</td><td>grau / grey</td></tr><tr><td>93774</td><td>7,50 m</td><td>grau / grey</td></tr><tr><td>93775</td><td>10,0 m</td><td>grau / grey</td></tr><tr><td>93776</td><td>15,0 m</td><td>grau / grey</td></tr><tr><td>93777</td><td>20,0 m</td><td>grau / grey</td></tr></table></div>		Nr. / No.	Länge / length	Farbe / color	93755	0,25 m	grau / grey	93756	0,50 m	grau / grey	93757	1,00 m	grau / grey	93770	1,50 m	grau / grey	93772	2,00 m	grau / grey	93771	3,00 m	grau / grey	93773	5,00 m	grau / grey	93774	7,50 m	grau / grey	93775	10,0 m	grau / grey	93776	15,0 m	grau / grey	93777	20,0 m	grau / grey	<div><div>CAT 6a Duplex-Netzwerkkabel Anschlüsse: 2 x RJ45-Stecker (8P8C)                   &gt; 2 x RJ45-Stecker (8P8C)</div><div>- Kontakte: vergoldet - Übertragungsfrequenz: 500 MHz - Innenleiter: 27AWG 7/0.135+-0.005 BC                   *1P+AL-FOIL - Farbcodierung: TIA/EIA 568C - Isolation: halogenfrei; LSZH - RoHS-konform</div><div>CAT 6a Duplex network cable Connectors: 2 x RJ45 plug (8P8C)                   &gt; 2 x RJ45 plug (8P8C)</div><div>- Contacts: gold-plated - Transmitting frequency: 500 MHz - Inner conductor: 27AWG 7/0.135                   +-0.005 BC*1P+AL-FOIL - Color coding: TIA/EIA 568C - Insulation: LSZH - RoHS compliant</div></div>								E
Nr. / No.							Länge / length	Farbe / color																																											
93755							0,25 m	grau / grey																																											
93756							0,50 m	grau / grey																																											
93757	1,00 m	grau / grey																																																	
93770	1,50 m	grau / grey																																																	
93772	2,00 m	grau / grey																																																	
93771	3,00 m	grau / grey																																																	
93773	5,00 m	grau / grey																																																	
93774	7,50 m	grau / grey																																																	
93775	10,0 m	grau / grey																																																	
93776	15,0 m	grau / grey																																																	
93777	20,0 m	grau / grey																																																	
F	F																																																		
G	G																																																		
H	H																																																		
I	Änderungen				Datum		Name		Bezeichnung				Blatt		I																																				
J	Datum		Name		gez.:	18.05.2016	jr		CAT 6a-0025 S/FTP DUPLEX LSZH						J																																				
					gepr.:	19.05.2016	tf		Zeichnungs-Nr.:						von																																				
					Norm:																																														
					Änderungen vorbehalten / Subject to change																																														
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																																					